EXPS2™



The Model EXPS2 maximizes rail space with its compact size and allows for co-witnessing of iron sights. It has convenient side buttons to add a magnifier and features an adjustable, locking, quick-detach lever for easy attachment and removal.

ORDER CODE


EXPS2-0
EXPS2-0GRN
EXPS2-2

BLACK

TECHNICAL SPECIFICATIONS

L × W × H	3.8" × 2.3" × 2.9" (96.5 × 58.4 × 73.7mm)
WEIGHT	11.2 oz (317.5g)
WATER-RESISTANT	10 ft (3m) depth
MOUNT	1" Weaver or MIL-STD 1913 rail
WINDAGE AND ELEVATION	0.5 MOA per click
BRIGHTNESS	20 daylight settings
POWER SOURCE	1 × CR123 battery
BATTERY LIFE	1,000 (600 for green) continuous hours at nominal setting 12 at room temp.
OPERATING TEMPERATURE	Red Reticle -40°F to 140°F (-40°C to 60°C) Green Reticle: -22°F to 140°F (-30°C to 60°C)
COUNTRY OF ORIGIN	Made in USA

RETICLE

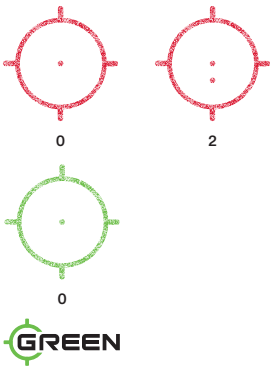

EOTECHINC.COM

EXPORT RESTRICTIONS: Export of this product is strictly controlled and enforced by the U.S. Department of Commerce, Bureau of Industry and Security, as prescribed in the Export Administration Regulation (EAR), Title 15, Code of Federal Regulations, Parts 730-774. EOTECH LLC does not authorize any of its dealers or distributors to export this commodity without prior, written authorization, and will not provide warranty or post-sales support of unauthorized international exports.

© 2022 EOTECH, LLC.
All rights reserved. EOTECH®, HWS® and Vudu® are registered trademarks of EOTECH, LLC.

CONTACT
46900 Port St.
Plymouth, MI 48170 USA
+1-888-368-4656